

## D6271 D6272

### Desktop Speech & Voting Chairman/Delegate Unit



#### Description

The D6271/D6272 Desktop Speech & Voting Chairman/Delegate Units integrate speaking, attendance registration, and voting functions in a single device. The chairman unit features a priority button for efficient meeting management. A 2.1-inch circular LCD touchscreen displays real-time unit status, with intuitive microphone button controls. Compact and user-friendly, these units are ideal for various conference settings.

#### Features


- Integrated functions including speech, attendance and voting functions in a single conference unit.
- Comes with a 2-meter dedicated 8-core DIN high-density cable with an aviation plug.
- Features an integrated square-column microphone stem with a cardioid electret condenser microphone and a dual-color ring indicator (red/green).
- Features a 2.1-inch circular LCD touchscreen for real-time display of unit operating status.
- Includes a 3.5mm stereo headphone monitoring jack for connecting headphones to monitor the speech from other units.
- Independent adjustment of microphone volume and headphone monitoring volume.
- Features a microphone on/off button, and a priority key on the chairman unit. Allows for speaking, attendance, and unit numbering via the microphone on/off button.
- Each unit has a unique ID number.
- Built-in 3 theme UI options, supporting both Chinese and English display.
- Compatible with cameras: after configuration via the digital conference system host or PC software, the unit can support automatic camera tracking.
- Self-diagnostic functionality when connected to the control host.
- Passive device powered by the system host; input voltage: 24V.
- Chairman unit supports priority function and podium mode through host configuration.
- Chairman unit can approve delegate units' requests to speak.
- Chairman unit can freely activate regardless of the number of active delegates.

- Chairman unit has full control over conference order with priority function.
- Chairman unit connection position is unrestricted.
- Supports “daisy-chain”, T-type, or star (“+”) connection modes.


## Specifications

Model	D6271	D6272
Structure Type	Desktop	
Effective Frequency	Unit A Input to Unit B Monitoring	80Hz-12kHz
Range with Gain	Host Line Input to Unit Monitoring	80Hz-16kHz
Limiting ( $\pm 3\text{dB}$ )	Unit to Host Line Output	80Hz-16kHz
Static Power Consumption	<1W	
Maximum Power Consumption	<2W	
Signal-to-Noise Ratio	>80dB (A-weighted)	
Crosstalk Attenuation	>80dB	
Harmonic Distortion	<0.3%	
Headphone Output	9dBu, 8-32Ω, 3.5mm	
Operating Power	Powered by host, DC24V	
Unit Interface	8-Core DIN dedicated connector	
Microphone	Microphone Type	Cardioid electret condenser
	Input Sensitivity	-42±2dBV/Pa
	Frequency Response	50Hz-20KHz
	Maximum Sound Pressure Level	125dB
Product Dimensions	153×130×119mm	
Package Dimensions	370×330×186mm	
Net Weight	0.8kg	
Gross Weight	2.0kg	


## Front / Rear Panel

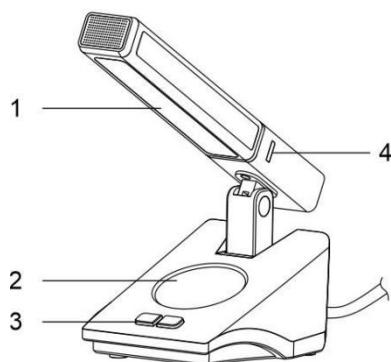

Front View of Chairman Unit

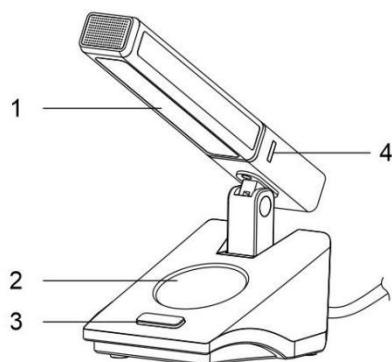

Front View of Delegate Unit

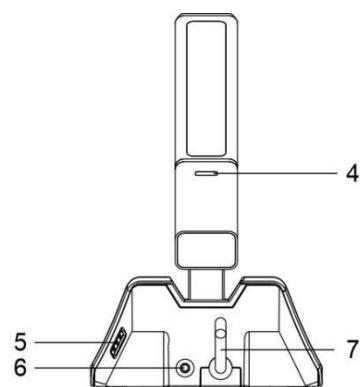

Rear View of Conference Unit

1. Microphone Stem
2. 2.1-Inch Circular LCD Touchscreen.
3. Microphone On/Off Button and Indicator.

Chairman Priority  
Button



Microphone  
On/Off Button

4. Microphone Indicator, red for speaking and green for requesting to speak.
5. Volume Control Buttons. Adjust microphone and headphone monitoring volume. Long press the VOL+ button to enter microphone volume adjustment. Long press the VOL- button to enter headphone monitoring volume adjustment.
6. 3.5mm Headphone Jack.
7. 2-Meter Dedicated 8-Core DIN High-Density Cable with an Aviation Plug.