

DSP6070

70W Professional Conference Speaker



Description

DSP6070 is a 70W constant resistance professional conference speaker that is made of aluminum alloy housing, with extremely textured appearance, which can provide professional-level sound performance and meet the needs of demanding venues.

Features


- Rated power: 70W
- Freq. Response: 95Hz-18kHz
- Sensitivity (1m,1W): 90±2dB
- Max SPL (1m): 108±2dB
- Streamlined design, simple and beautiful shape, suitable for decoration in various places.
- Adopts a combination of 4.5" fiberglass drum woofer and 1" neodymium tweeter, with wide frequency response, clear bass and bright treble.
- Equipped with a multifunctional mounting bracket for easy installation.
- Durable aluminum alloy housing and aluminum mesh, not easy to deform and rust.

Specifications

Model	DSP6070
Speaker Unit	4.5"×2, 1"×1
Rated Impedance	4Ω
Rated Power(RMS)	70W
Freq. Resp. Range	95Hz-18kHz
Sensitivity(1m,1W)	90±2dB

Max.SPL(1m)	108±2dB
Product Size (H×W×D)	420×140×155mm
Package Size (2PCS/CTN)	527×420×225mm
Net Weight (1PC)	5.0kg
Gross Weight (2PCS/CTN)	12.8kg


Product Information

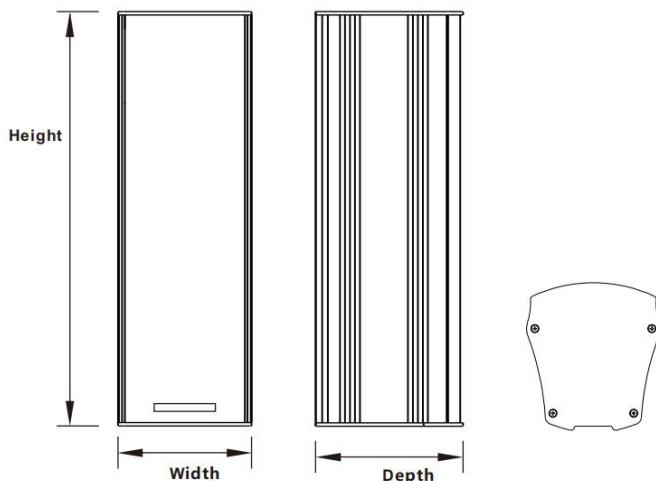

Model	Height	Width	Depth
DSP6070	420	140	155

(Unit: mm)

Frequency Response Characteristics (dB SPL, 1W, 1m)

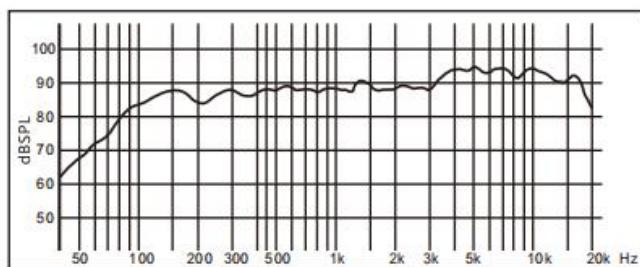

Distortion Characteristics (THD< 3% 1W, 1m, 100Hz-10kHz)

