

D5812

Wireless Lavalier Microphone



Description

The D5812 is a single-lavalier wireless microphone with a display screen showing frequency and battery status. It features infrared (IR) frequency synchronization, adjustable input gain, and is powered by 2 × AA batteries for over 8 hours of operation. Equipped with a $\frac{1}{4}$ -wave whip antenna, a belt clip, and a detachable XLR connector, the D5812 delivers reliable, professional audio in a compact and user-friendly design.

Features

- Single-lavalier microphone design;
- Display screen showing frequency and battery status;
- Infrared (IR) frequency synchronization;
- Adjustable input gain control;
- Powered by 2 × AA batteries


Specifications

Model	D5812
Antenna Type	$\frac{1}{4}$ -Wave Whip Antenna
Output Power	14dBm
Spurious Suppression	-60dB
Power Supply Mode	2 × AA (1.5 V) Alkaline Batteries
Battery Life	>8 Hours
Display Type	Display Screen
Product Dimension(H×W×D)	110×64×25mm

Weight

0.1kg

Front / Rear Panel

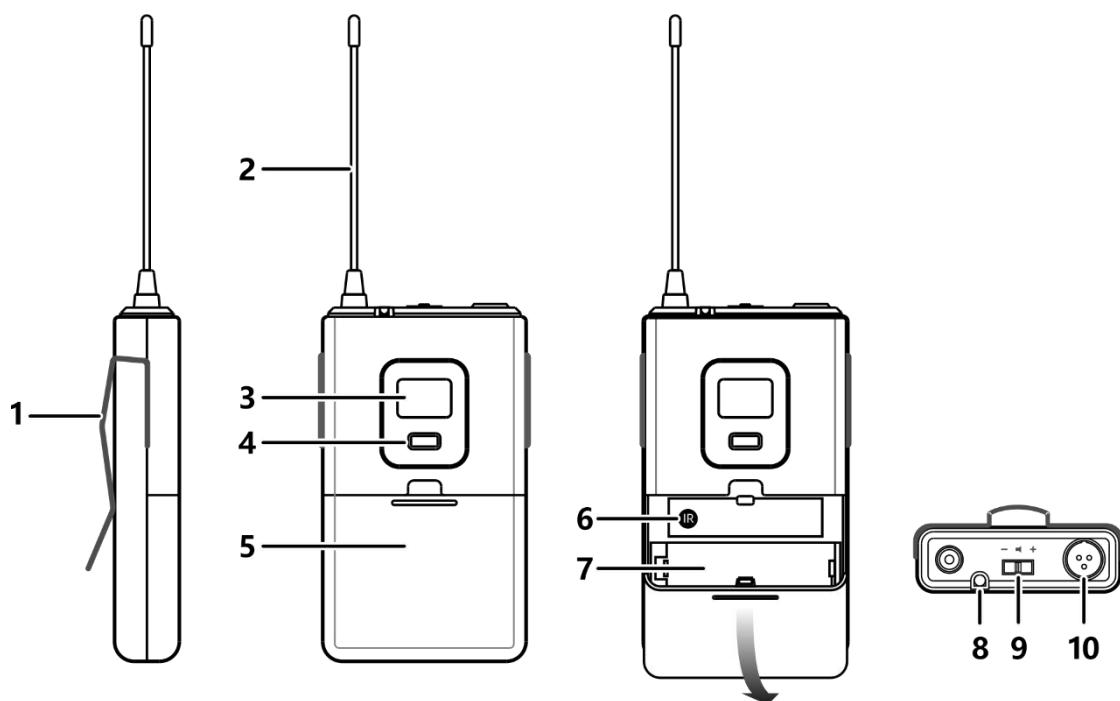

- ① Belt Clip (for securing the wireless microphone)
- ② Antenna
- ③ Display Screen
- ④ Power Switch
- ⑤ Battery Compartment Cover
- ⑥ Infrared (IR) Synchronization Window
- ⑦ Battery Compartment
- ⑧ Status Indicator Light
- ⑨ Gain Adjustment Switch
- ⑩ Detachable XLR Connector