

## D5814L

## Desktop Wireless Rechargeable Microphone



## Description

The D5814L Desktop Wireless Rechargeable Microphone features a gooseneck design with infrared frequency pairing and adjustable RF power. Its display shows real-time frequency, channel, and volume information. With a built-in Type-C charging port and over 10 hours of battery life, it is ideal for meetings, broadcasting, and various audio applications.


## Features

- Gooseneck microphone design; an optional square microphone is available.
- Display screen shows frequency, channel, RF signal strength, and volume level.
- Infrared frequency synchronization.
- Adjustable RF signal output power and volume level.
- Supports TYPE-C charging interface.

## Specifications

Model	D5814L
Antenna Type	Built-in PCB antenna
RF Output Power	High power: 14dBm; Low power: 6dBm
Spurious Suppression	-60dB
Power Supply	3.7V/2000mA lithium battery
Battery Life	>10 hours at 14dBm; >15 hours at 6dBm
Display Type	Display screen
Product Dimensions	151×100×55mm
Weight	0.45kg

## Front / Rear Panel

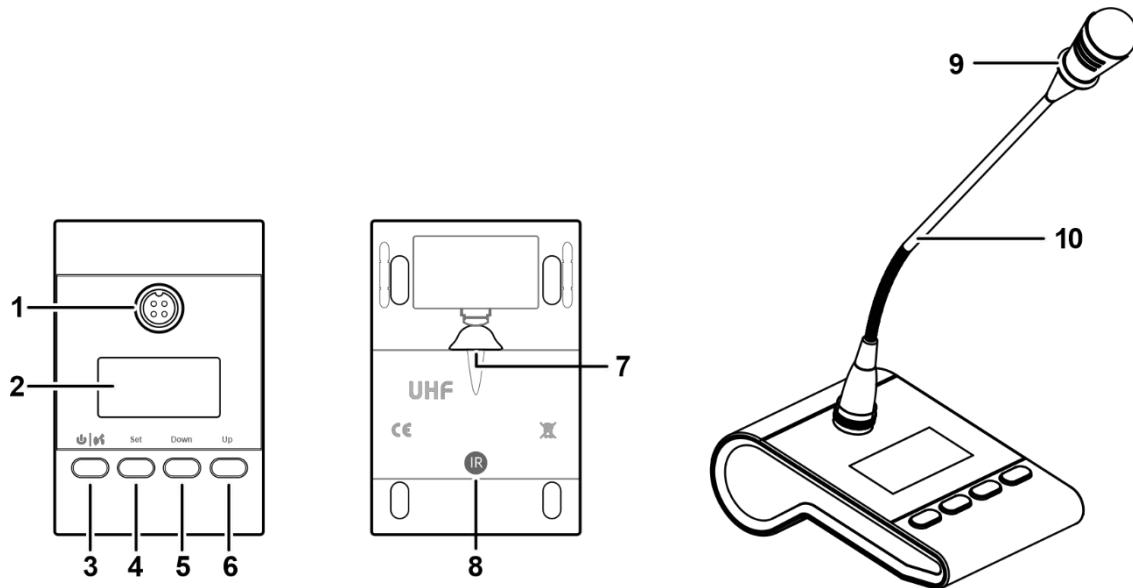

1. 4-pin spiral microphone connector.
2. Display screen.
3. Power / Speak button.
4. SET button.
5. Down selection button.
6. Up selection button.
7. Type-C charging port and indicator light.
8. Infrared frequency synchronization window.
9. Microphone indicator light ring.
10. Microphone stem.